


TWO STREETS, BOTH DOORS

Both doors open, but a fixed order in and out

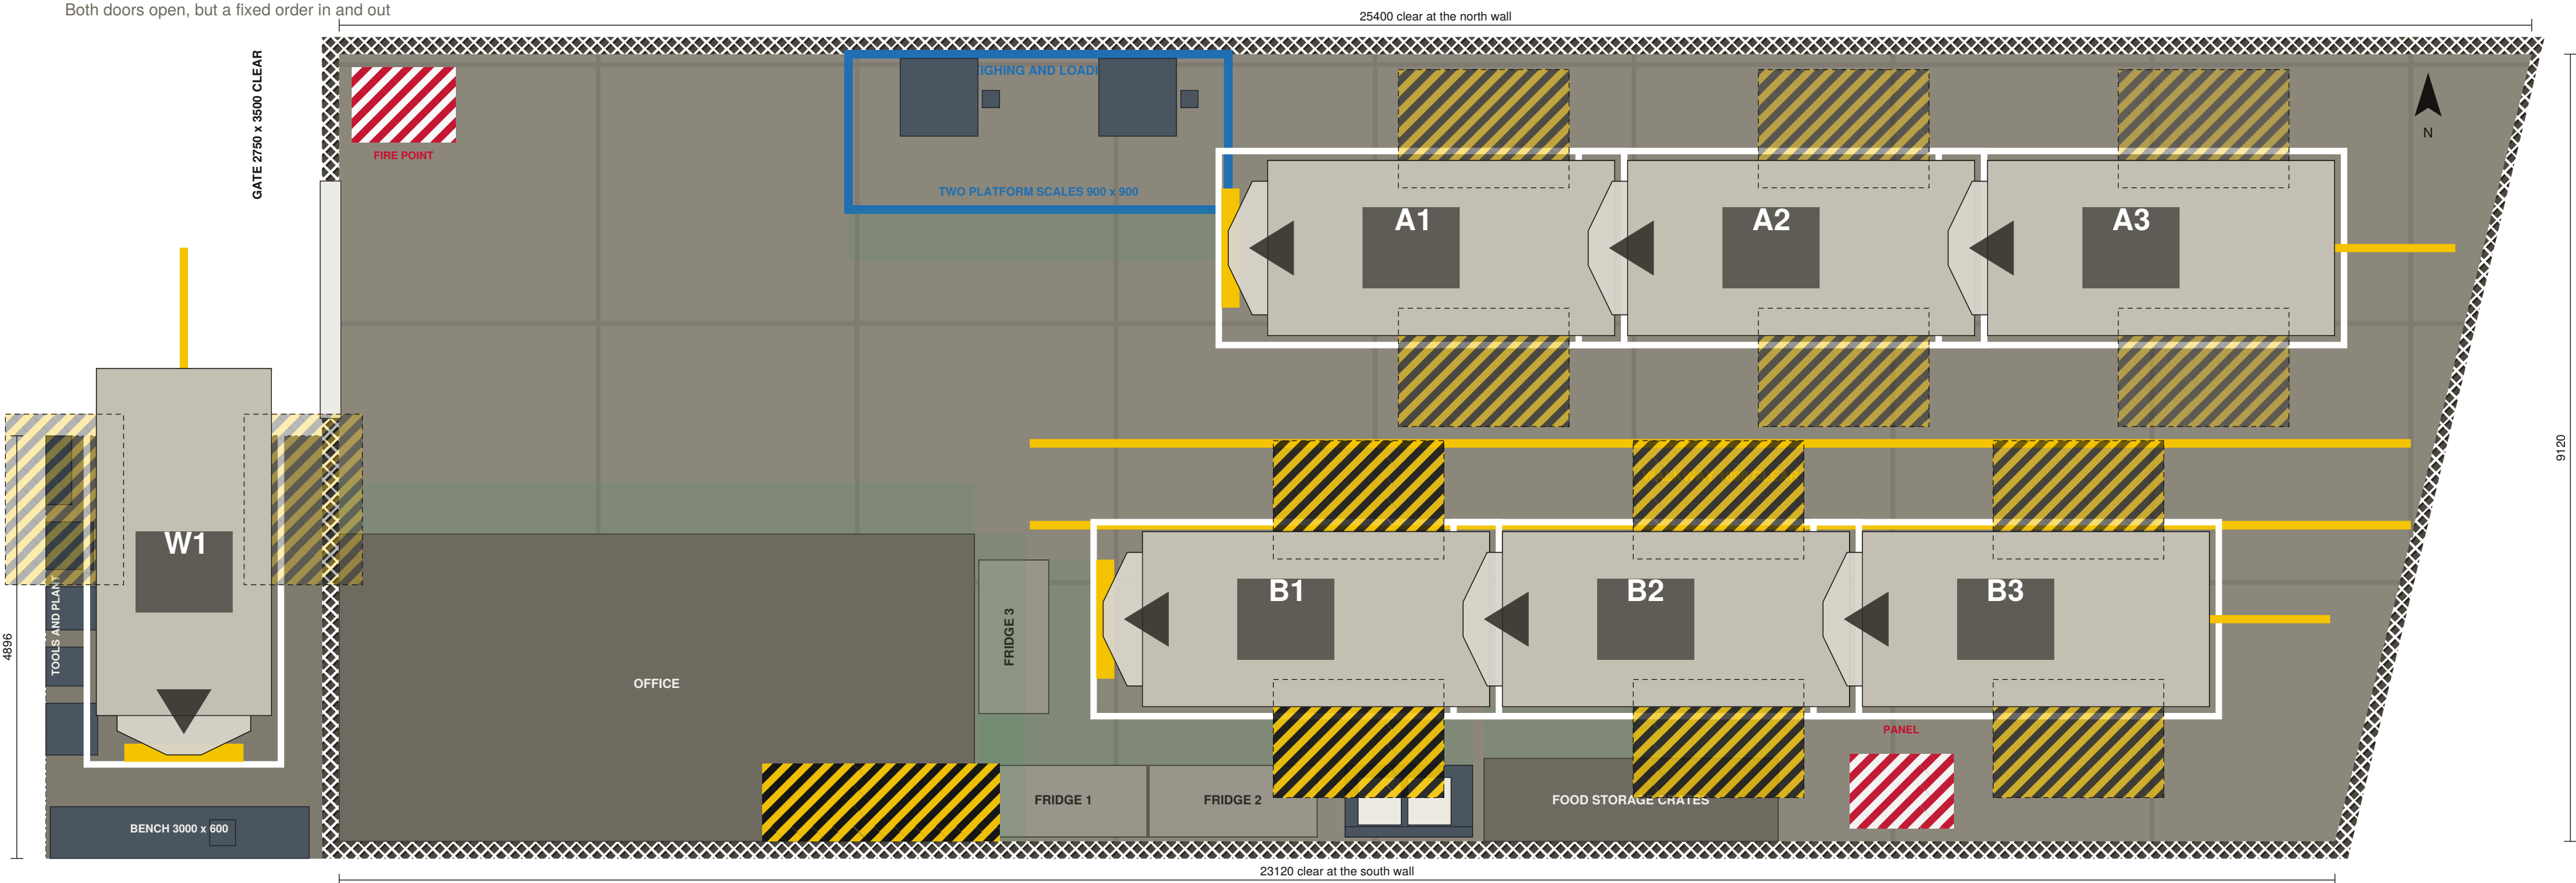

FLAGSHIPS INSIDE	6
PLUS THE WORKSHOP BAY	1
EVERY VEHICLE OPENS	both doors
STREET PITCH	4170 mm
CLEARANCE AT FITTINGS	600 mm minimum
WALKWAY BETWEEN ROWS	2272 mm
ANY VEHICLE, ANY ORDER	no, fixed order
TIGHTEST POINT DRIVING OUT	41 mm

FLOOR MARKING SCHEDULE

	Black / yellow hatch Door swing. Keep clear. 1988 mm headroom.
	Yellow 100 mm Lead-in line and traffic lane edge.
	White 75 mm Vehicle stand outline and stand number.
	Blue 100 mm Weighing and loading zone, cold chain.
	Green tint 600 mm working strip at every fitting.
	Red / white hatch Fire point and electrical panel.

DAILY SEQUENCE

- Street A fills first, east to west, then street B.
- Both doors open on all six. Load them together.
- Morning: A1, A2, A3, then B3, B2, B1. That order is fixed.
- A vehicle that returns early cannot take its stand out of turn.
- The middle strip stays clear as the walkway.

NOTES

- Six inside plus the workshop bay: what both doors open costs when the order stays as it is today.
- Both doors open changes nothing nose to tail. A door leaf is 1976 mm and the street pitch is 4170, so the leaves never meet. The cost is sideways: two rows now need 4300 mm between them instead of 3232.
- The price is the morning juggling the review wants rid of. Six vehicles, one fixed order, and nobody can leave out of turn.
- Driven and verified: the whole departure runs A1 through B1 with a tightest point of 41 mm.
- Take this only if loading all six at once matters more than the order they leave in.